

***** GENERAL INFORMATION PROVIDED ON LAST 3 PAGES *****

Density 1 g/cm³

Surface tension with glass = $\frac{72.8g}{cm\ sec^2}$

Dynamic viscosity 1 centipoise

Specific weight of water = 62.4 lbs/ft³

Kinematic viscosity 1 centistoke

Typical barometric pressures

sea-level ~14.7 psi

Denver ~12.2 psi

Mt. Everest ~4.9psi

$$1\text{centipoise} = \frac{0.01g}{cm\ sec}$$

$$1\text{atm} = \frac{1.01325 \times 10^{-6} g}{cm\ sec^2}$$

TABLE 2.1. Saturation humidity of air (grams per cubic meter)

Temperature °C	Humidity
-25	0.705
-20 -4°F	1.074
-15	1.605
-10	2.358
-5	3.407
0	4.874
5	6.797
10	9.399
15	12.83
20 68°F	17.30
25	23.05
30	30.38

SOURCE: Handbook of Chemistry and Physics (Cleveland, Ohio: CRC Publishing Company, 1976).

TABLE 2.2. Class-A land pan coefficients for midwestern United States

January	0.62	July	0.76
February	0.72	August	0.75
March	0.77	September	0.73
April	0.77	October	0.69
May	0.78	November	0.63
June	0.77	December	0.58
Annual 0.75			

SOURCE: W. J. Roberts and J. B. Stall, Illinois State Water Survey Report of Investigation 57, 1967.

Description of Area	C
Business	
Downtown	0.70-0.95
Neighborhood	0.50-0.70
Residential	
Single-family	0.30-0.50
Multiunits, detached	0.40-0.60
Multiunits, attached	0.60-0.75
Residential suburban	0.25-0.40
Apartment	0.50-0.70
Industrial	
Light	0.50-0.80
Heavy	0.60-0.90
Parks, cemeteries	0.10-0.25
Playgrounds	0.20-0.35
Railroad yard	0.20-0.35
Unimproved	0.10-0.30
Character of surface	
Pavement	
Asphalt and concrete	0.70-0.95
Brick	0.70-0.85
Roofs	0.75-0.95
Lawns, sandy soil	
Flat, up to 2% grade	0.05-0.10
Average, 2%-7% grade	0.10-0.15
Steep, over 7%	0.15-0.20
Lawns, heavy soil	
Flat, up to 2% grade	0.13-0.17
Average, 2%-7% grade	0.18-0.22
Steep, over 7%	0.25-0.35

SOURCE: American Society of Civil Engineers, Manuals and Reports of Engineering Practice No. 37, 1970.

The velocity of flow is dependent upon the amount of friction between the water and the stream channel. Smoother channels will have less friction and, hence, faster flow. Channel roughness contributes to turbulence, which dissipates energy and reduces flow velocity. The following values for *n* are typical:



- mountain streams with rocky beds: 0.04-0.05
- winding natural streams with weeds: 0.035
- natural streams with little vegetation: 0.025
- straight, unlined earth canals: 0.020
- smoothed concrete: 0.012

***** GENERAL INFORMATION PROVIDED ON LAST 3 PAGES *****

Element	H	C	N	O	Na	Mg	Al	S	Cl	K	Ca
Atomic weight	1	12	14	16	23	24	27	32	35.5	39	40

$$\text{for } L_w < h \ln\left(\frac{R_e}{R}\right) = \left[\frac{1.1}{\ln\left(\frac{L_w}{R}\right)} + \frac{A + B \ln\left(\frac{h - L_w}{R}\right)}{\frac{L_e}{R}} \right]^{-1}$$

$$\text{for } L_w = h \ln\left(\frac{R_e}{R}\right) = \left[\frac{1.1}{\ln\left(\frac{L_w}{R}\right)} + \frac{C}{\frac{L_e}{R}} \right]^{-1}$$

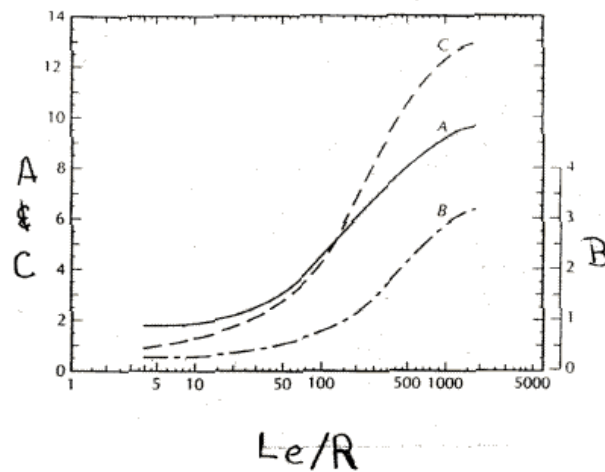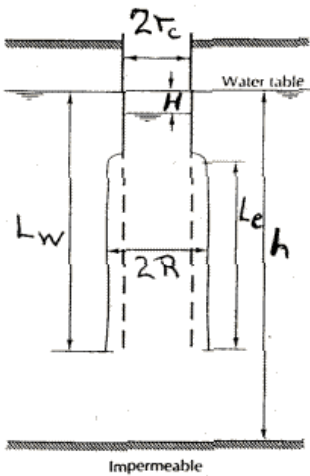

***** GENERAL INFORMATION PROVIDED ON LAST 3 PAGES *****

u	$W(u)$	u	$W(u)$	u	$W(u)$	u	$W(u)$
1×10^{-10}	22.45	7×10^{-8}	15.90	4×10^{-5}	9.55	1×10^{-2}	4.04
2	21.76	8	15.76	5	9.33	2	3.35
3	21.35	9	15.65	6	9.14	3	2.96
4	21.06	1×10^{-7}	15.54	7	8.99	4	2.68
5	20.84	2	14.85	8	8.86	5	2.47
6	20.66	3	14.44	9	8.74	6	2.30
7	20.50	4	14.15	1×10^{-4}	8.63	7	2.15
8	20.37	5	13.93	2	7.94	8	2.03
9	20.25	6	13.75	3	7.53	9	1.92
1×10^{-9}	20.15	7	13.60	4	7.25	1×10^{-1}	1.823
2	19.45	8	13.46	5	7.02	2	1.223
3	19.05	9	13.34	6	6.84	3	0.906
4	18.76	1×10^{-6}	13.24	7	6.69	4	0.702
5	18.54	2	12.55	8	6.55	5	0.560
6	18.35	3	12.14	9	6.44	6	0.454
7	18.20	4	11.85	1×10^{-3}	6.33	7	0.374
8	18.07	5	11.63	2	5.64	8	0.311
9	17.95	6	11.45	3	5.23	9	0.260
1×10^{-8}	17.84	7	11.29	4	4.95	1×10^0	0.219
2	17.15	8	11.16	5	4.73	2	0.049
3	16.74	9	11.04	6	4.54	3	0.013
4	16.46	1×10^{-5}	10.94	7	4.39	4	0.004
5	16.23	2	10.24	8	4.26	5	0.001
6	16.05	3	9.84	9	4.14		